


MFHP-00004PSM

Passive GaAs MMIC 6 GHz Highpass Filter

DEVICE OVERVIEW

General Description

The MFHP-00004PSM family of passive MMIC surface mount highpass filters are an ideal solution for small form factor, high rejection filtering. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. The MFHP-00004PSM is available as a 4x4mm plastic QFN. Low unit to unit variation allows for accurate simulations using the provided S2P file taken from measured production units.



Features

- Low Passband Insertion Loss with Fast Roll-off
- Excellent Return Loss
- High Stop Band Suppression

Applications

- SATCOM
- Radar

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MFHP-00004PSM	Passive GaAs MMIC 6 GHz Highpass Filter	QFN	RoHS REACH	Released	EAR99
EVB-MFHP-00004P	Evaluation Board, Passive GaAs MMIC 6GHz Highpass Filter	EVB	RoHS REACH	Released	EAR99

Table Of Contents

■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Typical Performance Plots
■ Port Configuration and Functions	■ Mechanical Data
Port Diagram	Outline Drawing
Port Functions	■ Footprint Image
■ Revision History	


Revision History

Revision Code	Revision Date	Comment
-	2023-10-04	Datasheet Initial Release




Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MFHP-00004PSM package outline drawing is shown below.

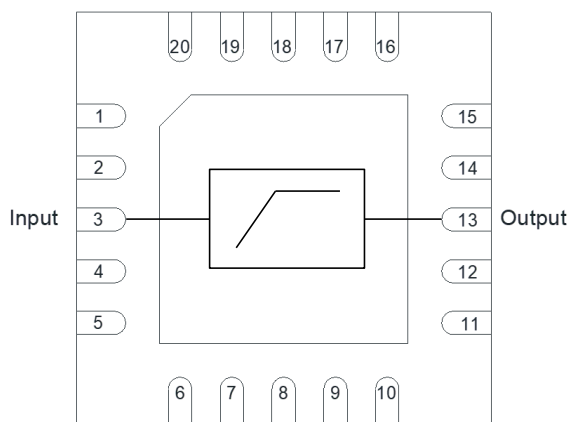

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	PSM package ground path is provided through the substrate and ground bond pads.	
Pin 13	Output	Pin 13 is DC open to ground for the PSM package.	
Pin 3	Input	Pin 3 is DC open to ground for the PSM package.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information

Parameter	Details	Rating
Dimensions	-	4 x 4 mm

MFHP-00004PSM

Passive GaAs MMIC 6 GHz Highpass Filter







Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the filter in a PSM package with a sine wave input applied to Pin 3. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
3dBc Cutoff Frequency	-	-	-	-	6	-	GHz
Group Delay	-	7	32	-	44	-	ps
Passband Insertion Loss	-	7	32	-	0.4	-	dB
Passband Return Loss	-	7	32	10	20	-	dB
Stopband Suppression	-	0	3.3	40	60	-	dB

Typical performance is de-embedded from EVB using AFR.

Typical Performance Plots

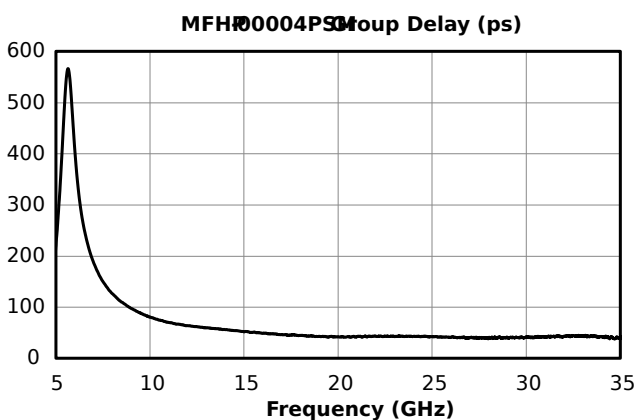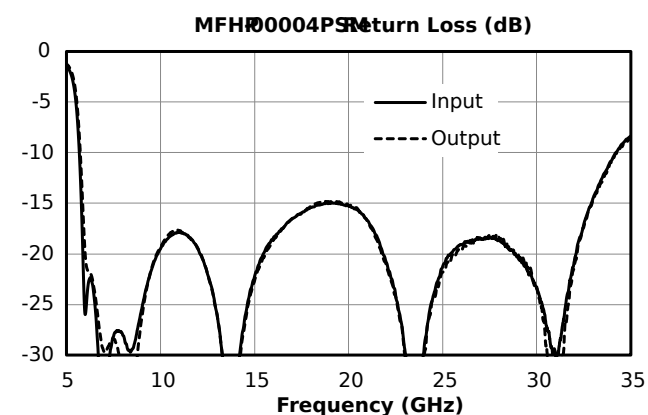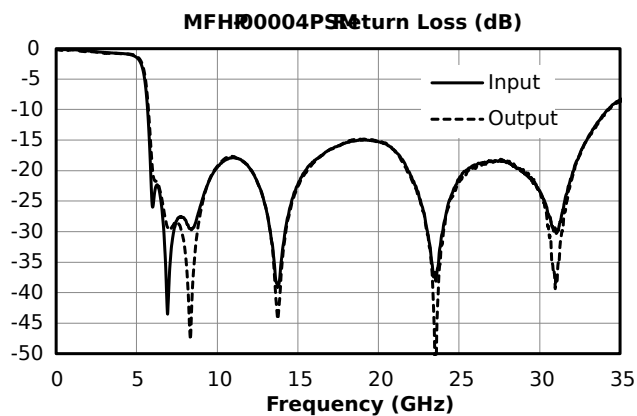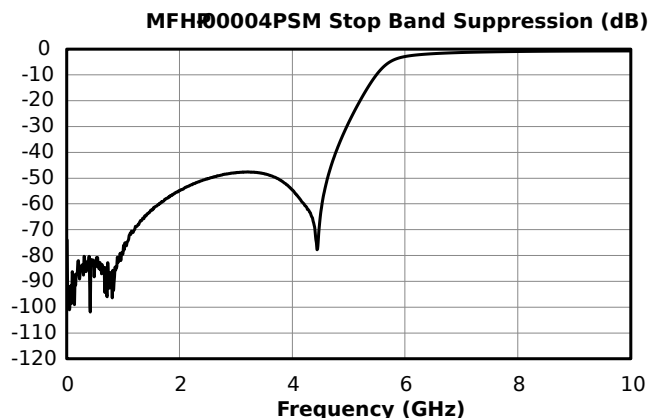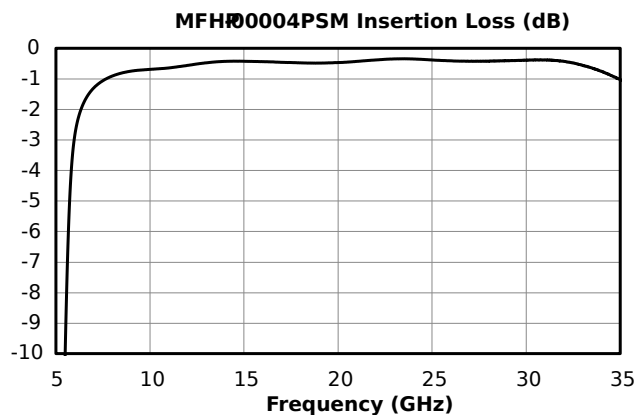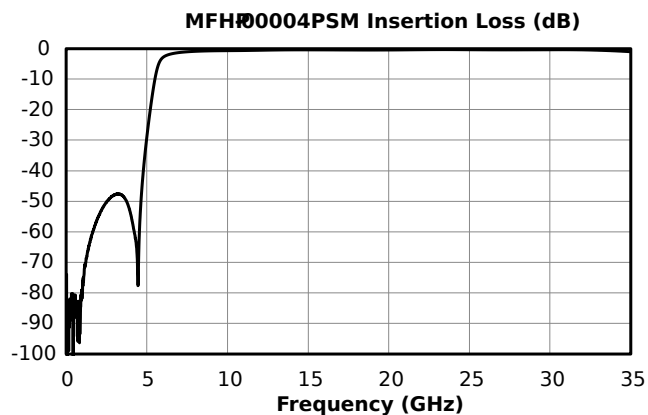


MFHP-00004PSM

Passive GaAs MMIC 6 GHz Highpass Filter

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

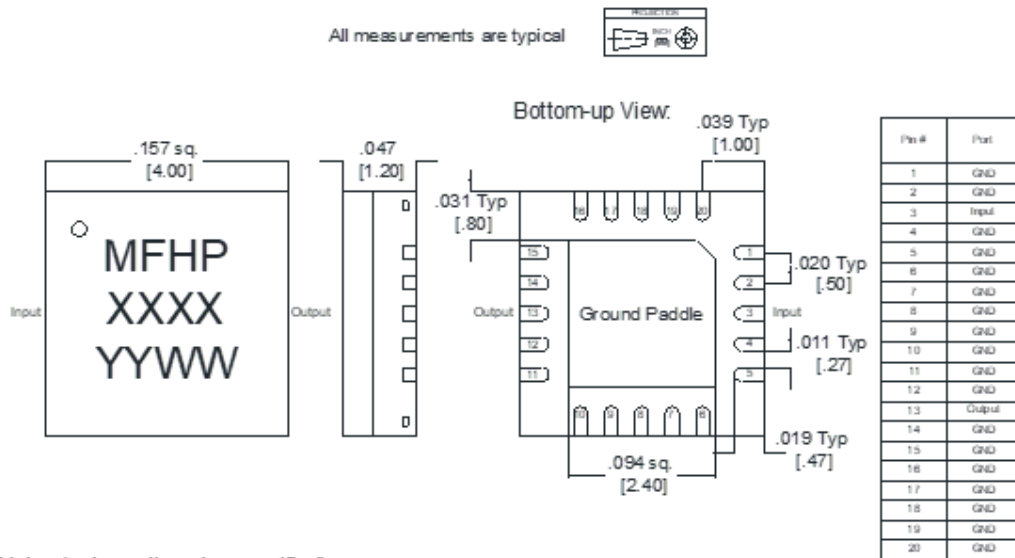

Notes (unless otherwise specified):


- Substrate material is LCP.
- I/O Leads and Die Paddle is (from base to finish):
Ni: 0.5um MIN
Pd: 0.02um MIN
Au: 0.05um MAX
- All unconnected pins should be connected to PCB RF ground.

MFHP-00004PSM

Passive GaAs MMIC 6 GHz Highpass Filter

Footprint Image

Download : [Footprint Drawing](#)

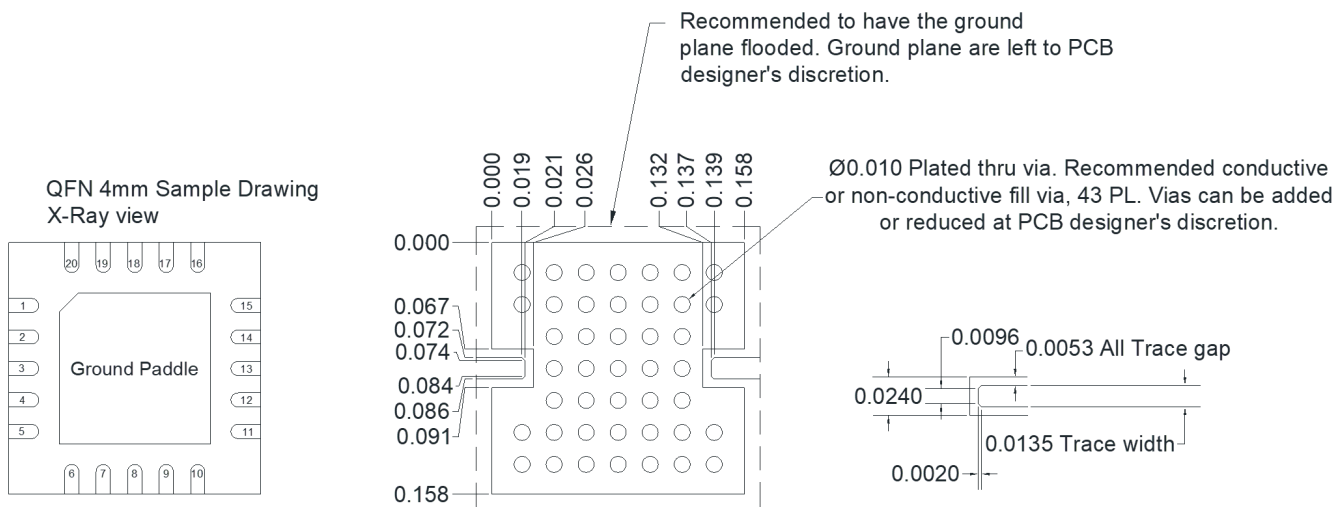

The Landing Pattern is to be used on Rogers 4003, 0.008" thick $\frac{1}{2}$ Oz Cu.

MFHP-00004PSM

Passive GaAs MMIC 6 GHz Highpass Filter

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2023, Marki Microwave, Inc