

2-10GHz 2-way Wilkinson Power Divider

PDW06041

COMPEX • DLI • JOHANSON MFG
NOVACAP • SYFER • VOLTRONICS
www.knowlescapacitors.com

DESCRIPTION

DLI's 2-10GHz 2-way power divider / combiner offers unmatched size and performance in a surface mount configuration. This power divider utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES


- Small Size
- Frequency Stable over Temperature
- Wirebond Package
- Excellent Repeatability
- Moisture Sensitivity Level: MSL1
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Typ.	Max
Nominal Power Splitting (dB)	2 - 10		3.0	
Nominal Phase Shift (Deg)			0.0	
Amplitude Balance (dB)				±0.03
Phase Balance (Deg)				±3.0
Excess Insertion Loss (dB)				0.75
Return Loss (dB)			20	
Isolation (dB)			20	
Power (W)				5

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

Typical Measured Performance

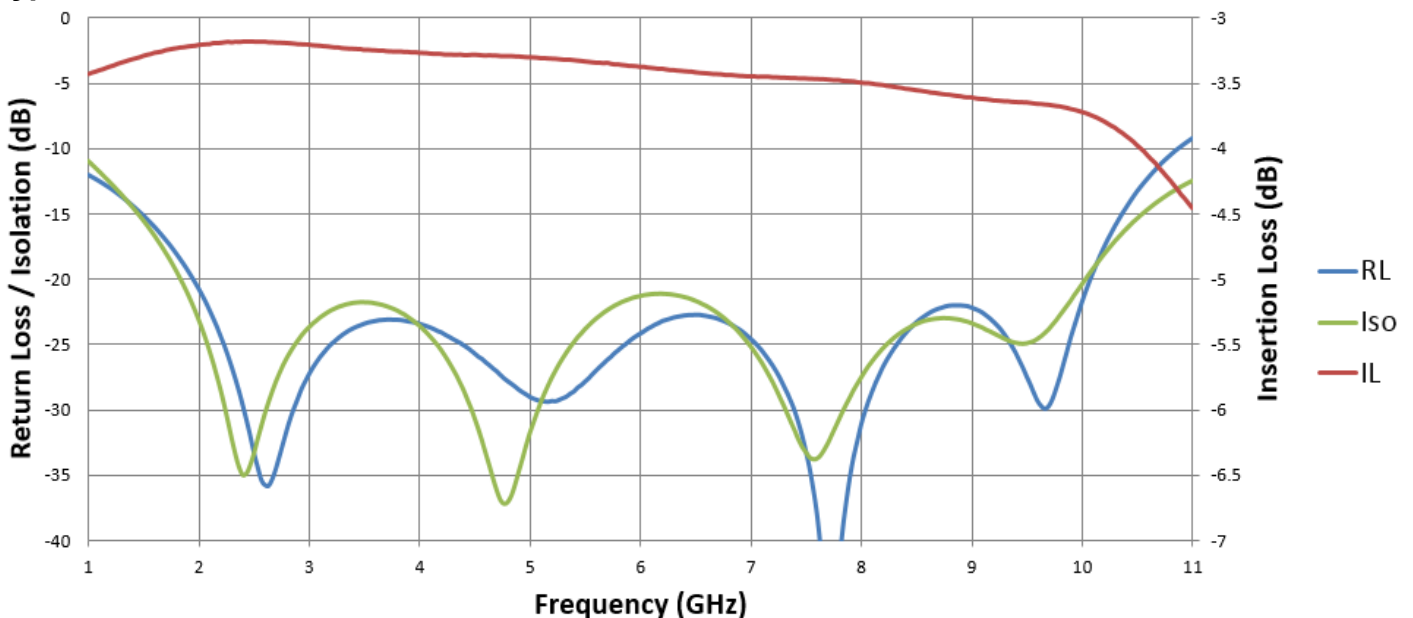


2-10GHz 2-way Wilkinson Power Divider


PDW06041

COMPEX • DLI • JOHANSON MFG
NOVACAP • SYFER • VOLTRONICS
www.knowlescapacitors.com

Physical Dimensions

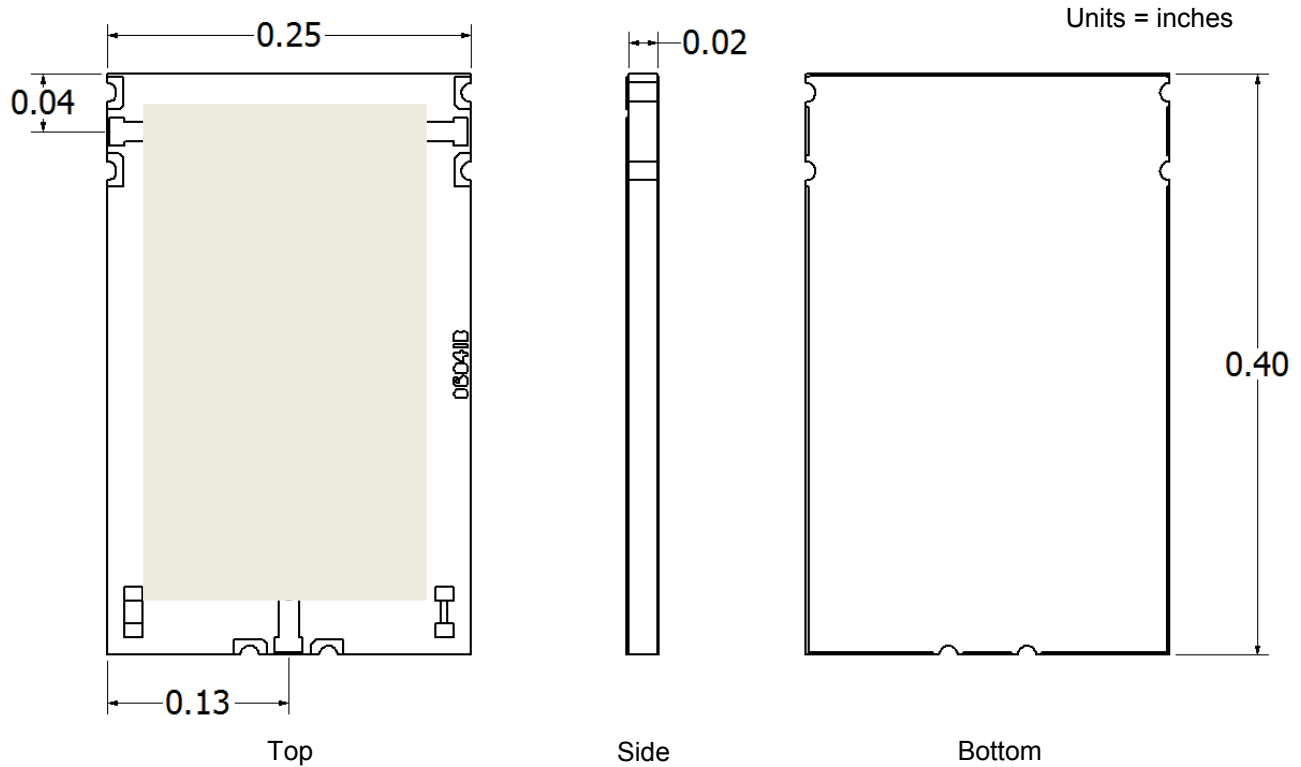

Recommended PCB Layout

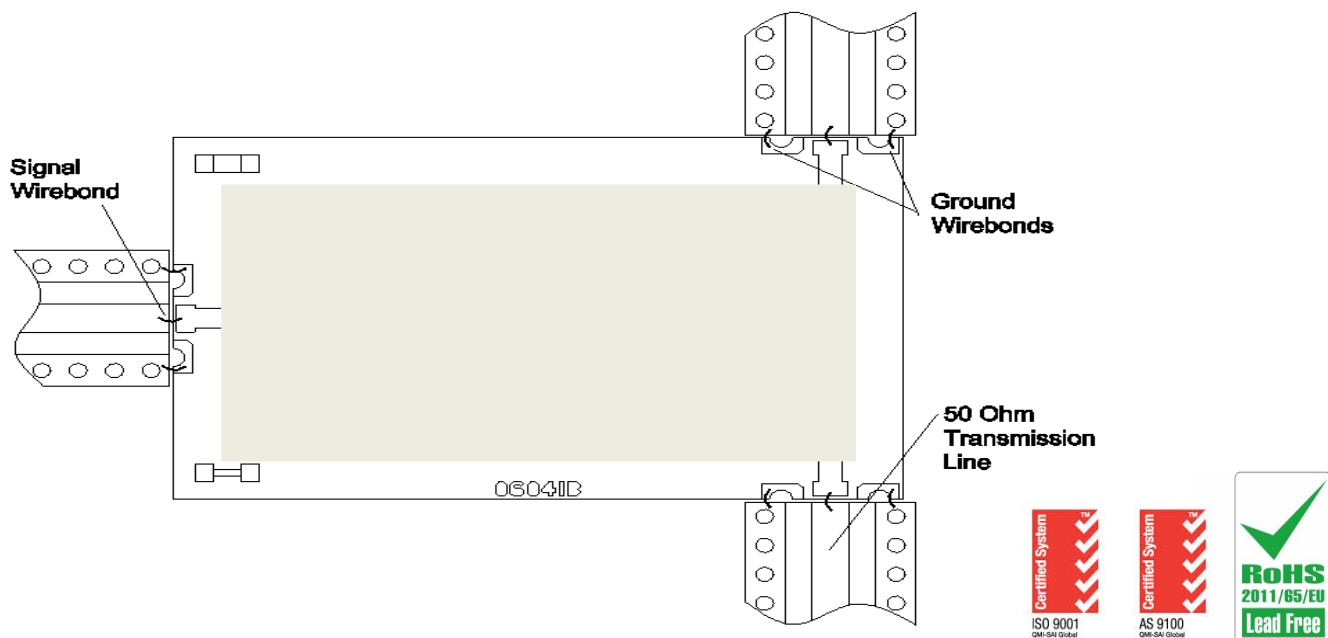

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

[PDW06041](#) [PDW06041-T](#)